



## Y1023

Reinforced Power Cable


---

**This Power Cable is strictly designed for use with the F2R y1000 device.**

### Installation:

#### On motorcycle

- **Route the Y1023 Power Cable under the motorcycle's tank and along the frame.** It may touch the engine but must not come into contact with the exhaust. Ensure the cable ring terminals can reach the battery connectors. Position the RED M8 Connector near the steering—without hindering its movement—for a direct connection to the Y1000 device.

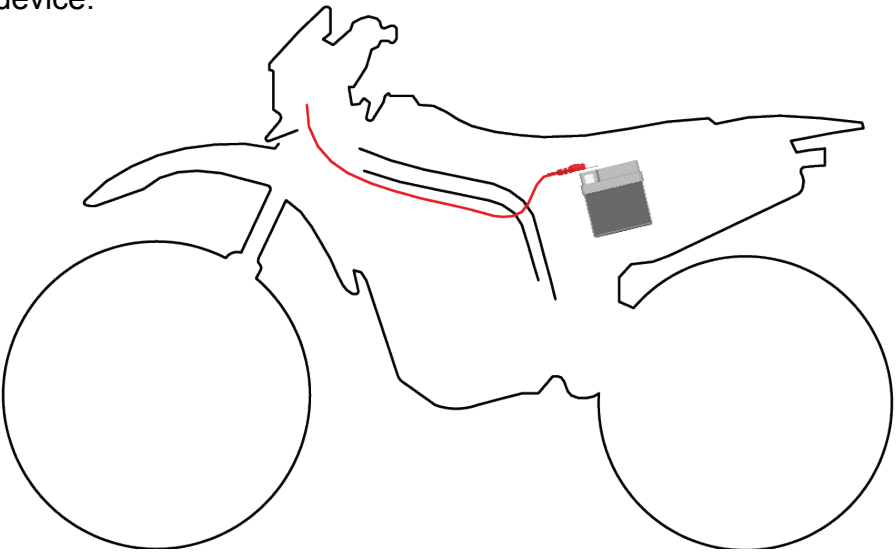

#### On SSV

- **Route the Y1023 Power Cable away from high-temperature sources.** Confirm that the cable ring terminals can reach the battery connectors. Position the RED M8 Connector near the bracket where the Y1000 will be mounted.




# Y1023

## Reinforced Power Cable

---

### Connection to Battery

- Attach the Y1023 Power Cable's ring terminals to the corresponding **RED positive (+)** and **BLACK negative (-)** battery terminals. **Use the provided washers to prevent loosening of the connections.** Ensure the cable avoids pinch points, sharp edges. Leave the fuse accessible for easy inspection and replacement. Finally, tighten all connections according to your bike's specifications.

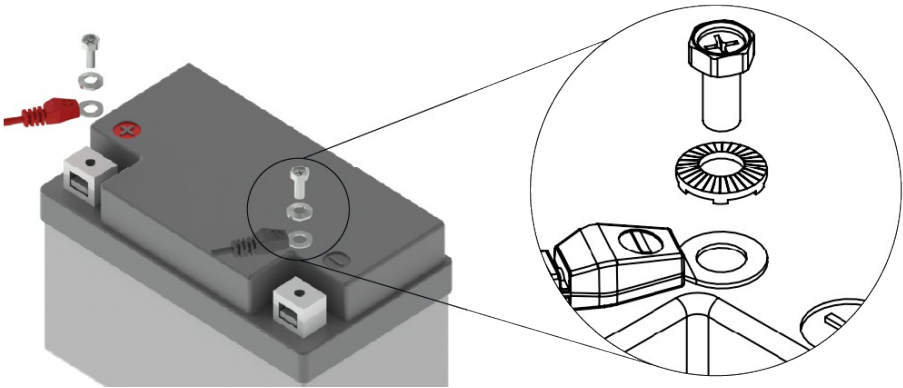

### **Package Includes:**

- 1 Cable Power with 2A fuse.
- 1 M8 Cap
- 2 Battery Washers

### **Warning:**

Tampering with this product will **void the warranty**, as it may cause malfunctions and damage to the **Y1000 device**.